



DIGISIGHT ULTRA N355

Digital Riflescopes






Reticle Catalogue

Notice

The values of the reticles indicated in this catalogue are correct:



- when the magnification of the riflescope is set to minimum;
- when "Picture-in-Picture" (PIP) mode is activated

X51i-150

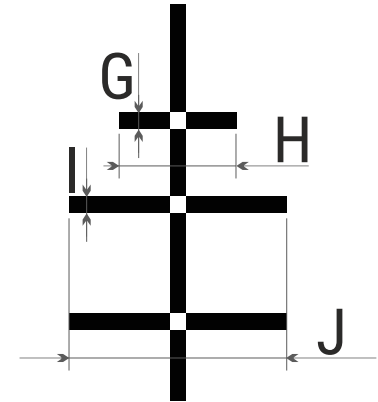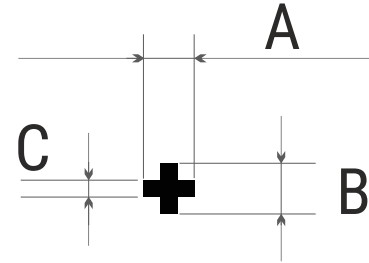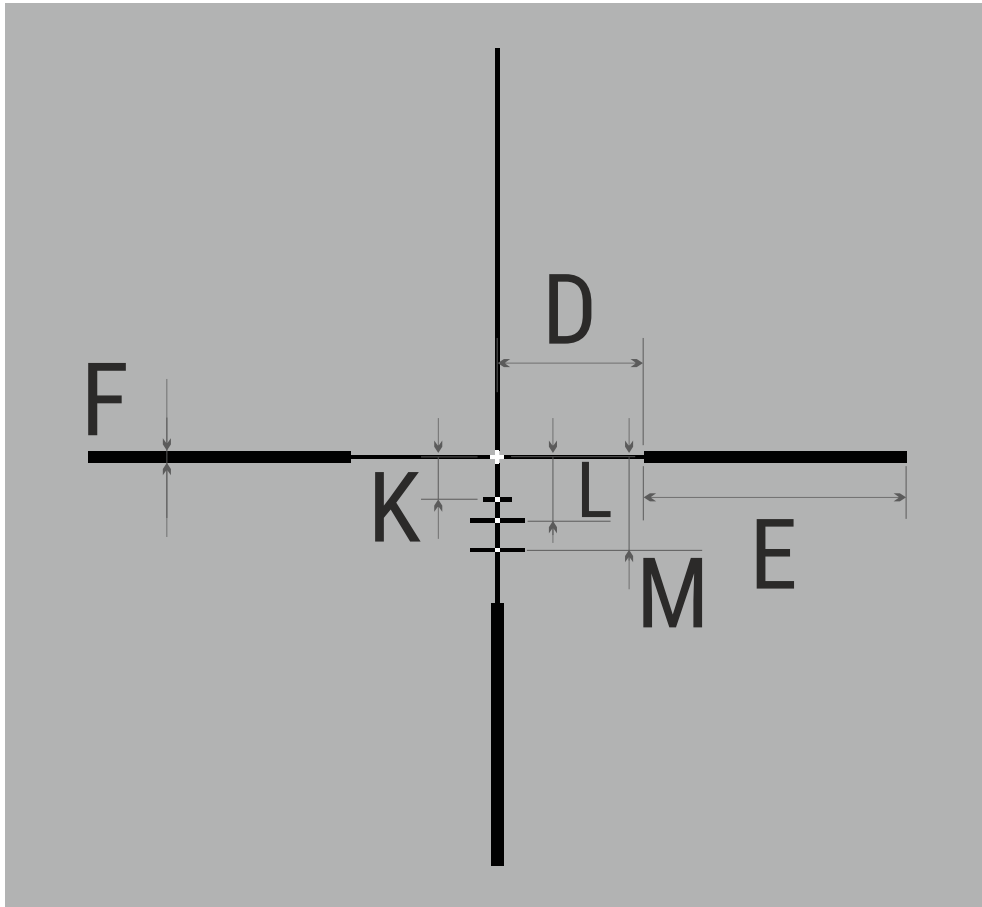



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.5 / 4 |
| Section B | 1.5 / 4 |
| Section C | 0.75 / 2 |
| Section D | 17.5 / 51 |
| Section E | 32.5 / 95 |
| Section F | 1.75 / 5 |
| Section G | 0.75 / 2 |
| Section H | 3.5 / 10 |
| Section I | 0.75 / 2 |
| Section J | 7 / 20 |
| Section K | 5 / 15 |
| Section L | 8 / 23 |
| Section M | 11,5 / 33 |

X51i-300

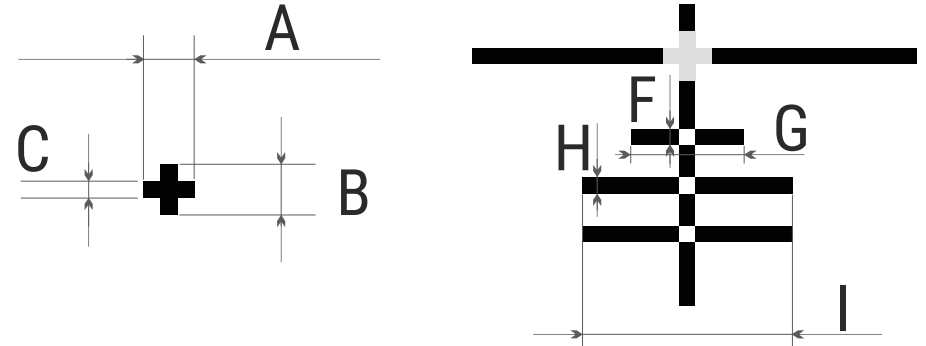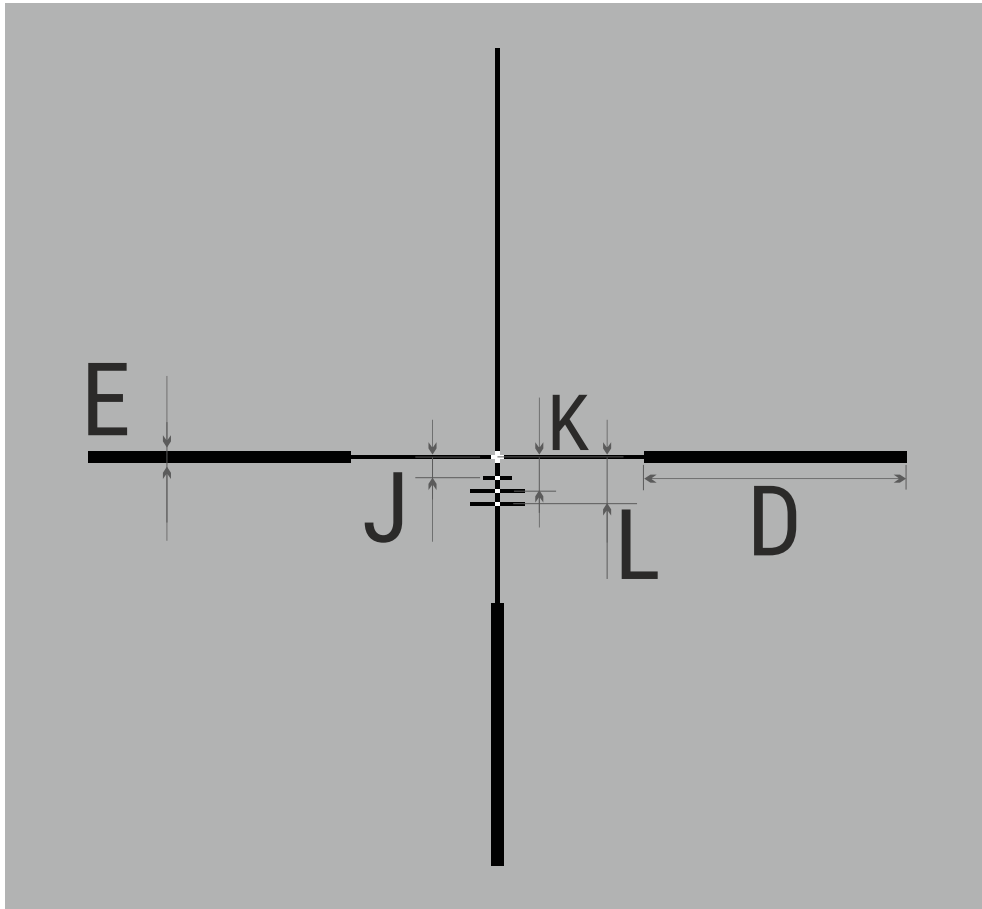



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.5 / 4 |
| Section B | 1.5 / 4 |
| Section C | 0.75 / 2 |
| Section D | 32.5 / 95 |
| Section E | 1.75 / 5 |
| Section F | 0.75 / 2 |
| Section G | 3.5 / 10 |
| Section H | 0.75 / 2 |
| Section I | 7 / 20 |
| Section J | 2.5 / 7 |
| Section K | 4 / 12 |
| Section L | 6 / 17 |

M51i

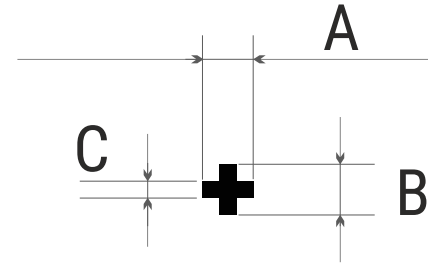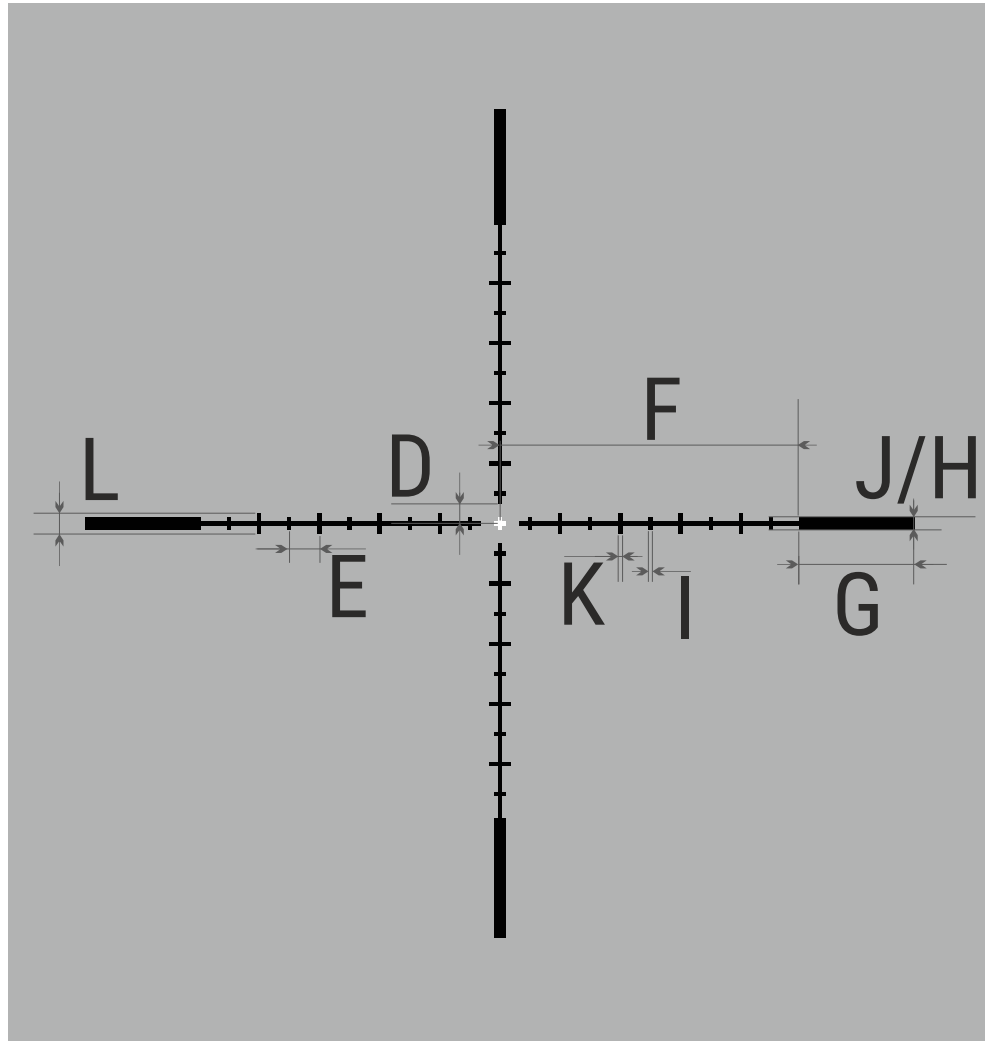



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.5 / 4 |
| Section B | 1.5 / 4 |
| Section C | 0.75 / 2 |
| Section D | 2.5 / 7 |
| Section E | 3.5 / 10 |
| Section F | 35 / 102 |
| Section G | 15 / 44 |
| Section H | 1.75 / 5 |
| Section I | 0.75 / 2 |
| Section J | 1.75 / 5 |
| Section K | 0.75 / 2 |
| Section L | 3.5 / 10 |

M52i

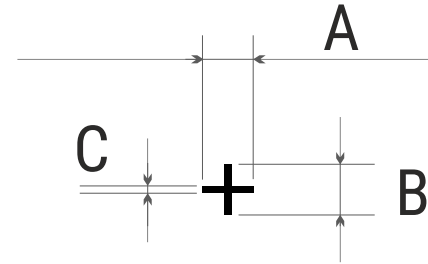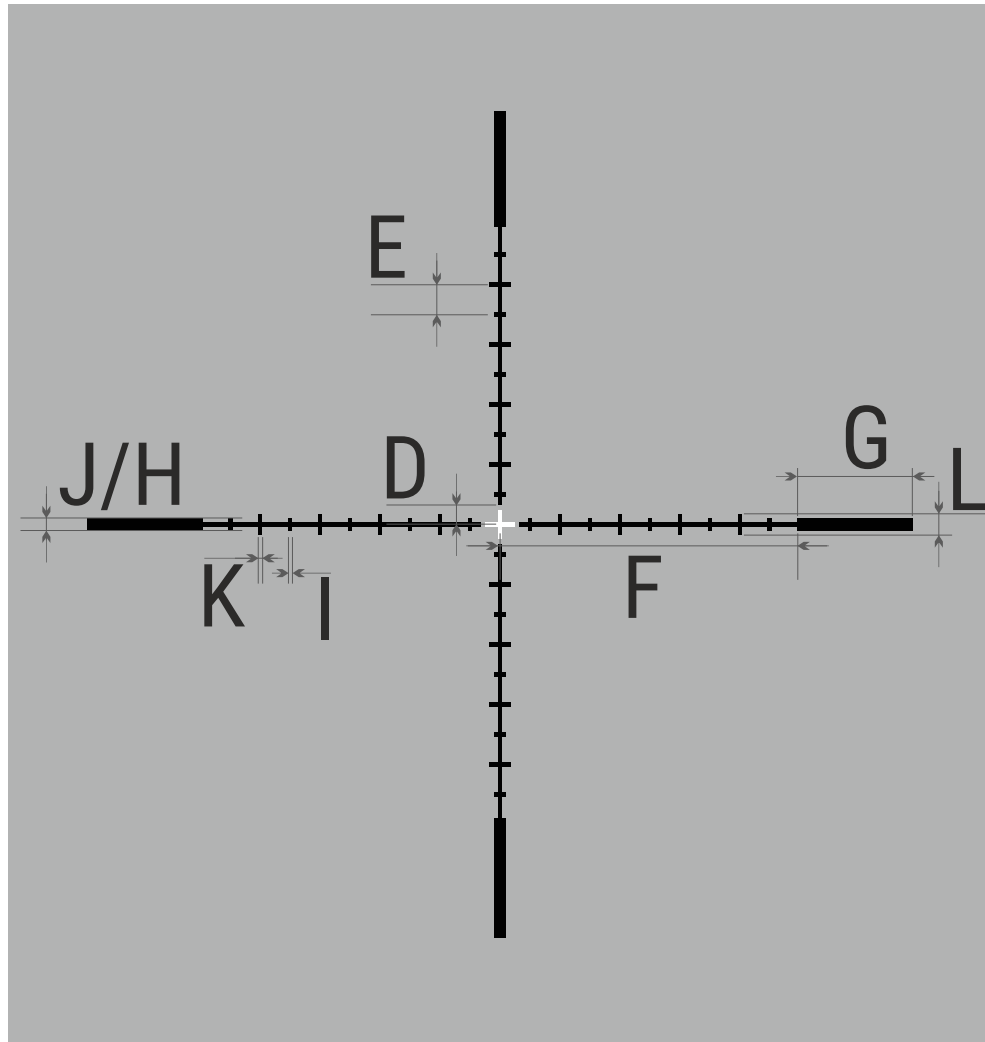



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 3.5 / 10 |
| Section B | 3.5 / 10 |
| Section C | 0.75 / 2 |
| Section D | 2.5 / 7 |
| Section E | 3.5 / 10 |
| Section F | 35 / 102 |
| Section G | 15 / 44 |
| Section H | 1.75 / 5 |
| Section I | 0.75 / 2 |
| Section J | 1.75 / 5 |
| Section K | 0.75 / 2 |
| Section L | 3.5 / 10 |

M53i

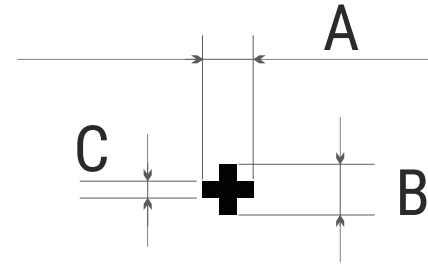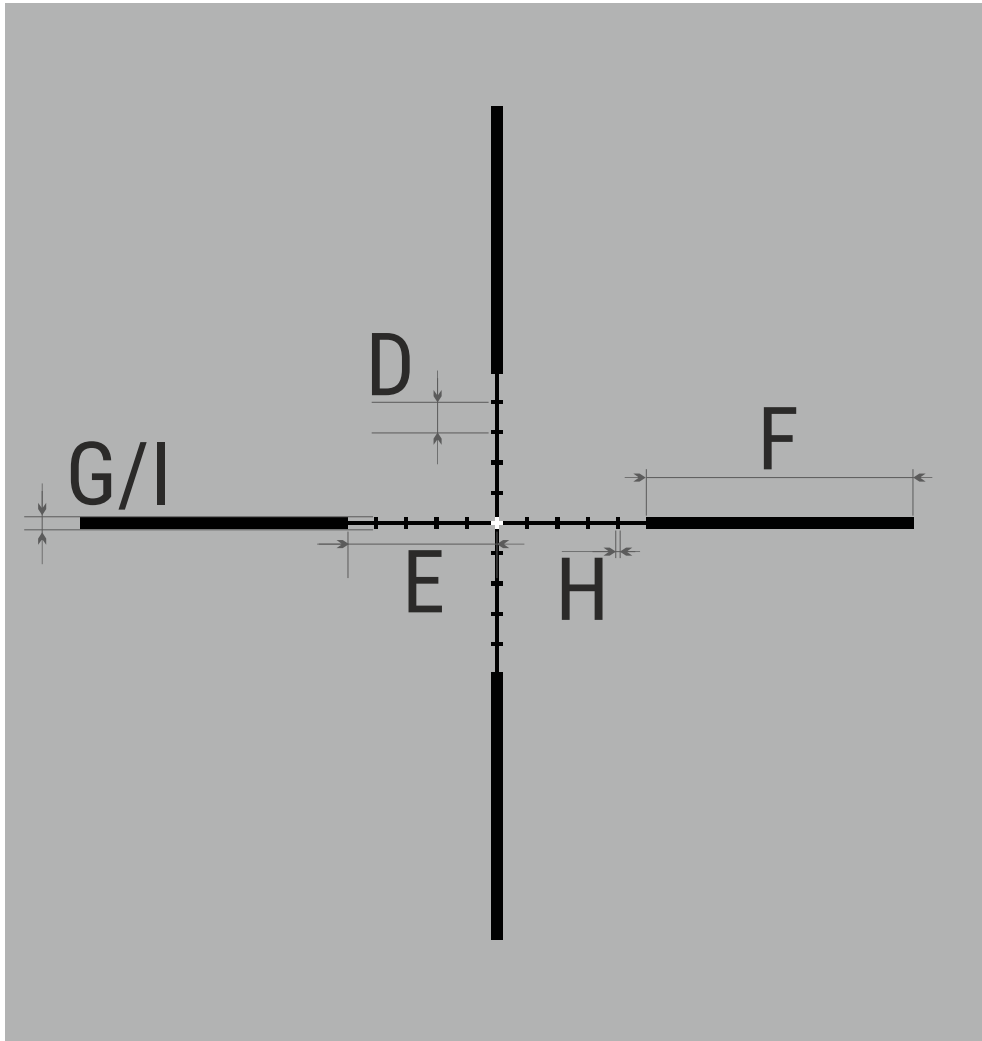



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.75 / 5 |
| Section B | 1.75 / 5 |
| Section C | 0.75 / 2 |
| Section D | 3.5 / 10 |
| Section E | 17.5 / 51 |
| Section F | 32.5 / 95 |
| Section G | 1.75 / 5 |
| Section H | 0.75 / 2 |
| Section I | 1/75 / 5 |

M55i

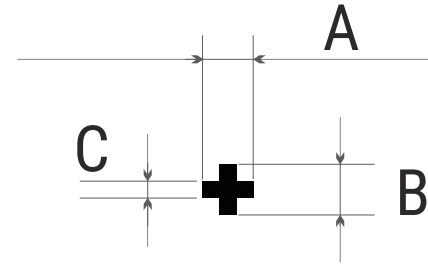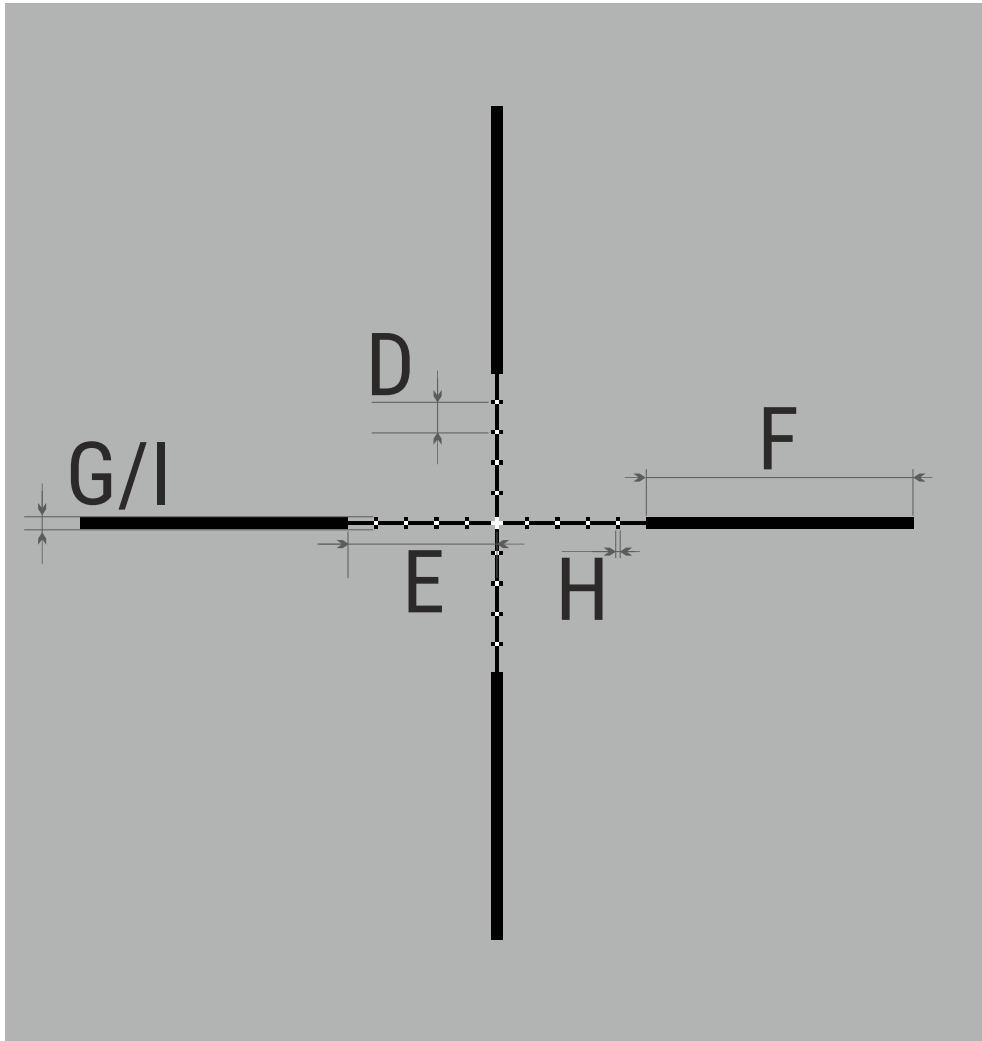



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.75 / 5 |
| Section B | 1.75 / 5 |
| Section C | 0.75 / 2 |
| Section D | 3.5 / 10 |
| Section E | 17.5 / 51 |
| Section F | 32.5 / 95 |
| Section G | 1.75 / 5 |
| Section H | 0.75 / 2 |
| Section I | 1/75 / 5 |

X55i

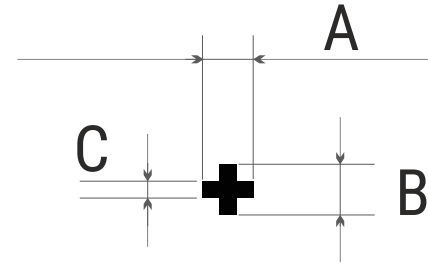



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.5 / 4 |
| Section B | 1.5 / 4 |
| Section C | 0.75 / 2 |
| Section D | 100 / 291 |
| Section E | 100 / 291 |

X52i

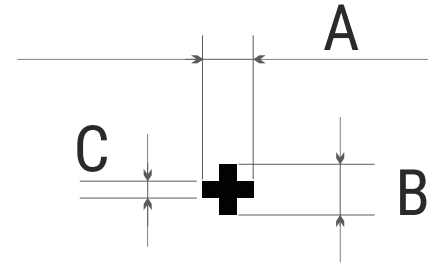



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.75 / 5 |
| Section B | 1.75 / 5 |
| Section C | 0.75 / 2 |
| Section D | 100 / 291 |
| Section E | 100 / 291 |

X57i

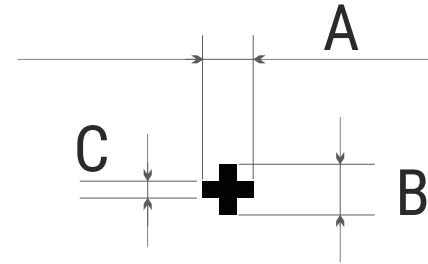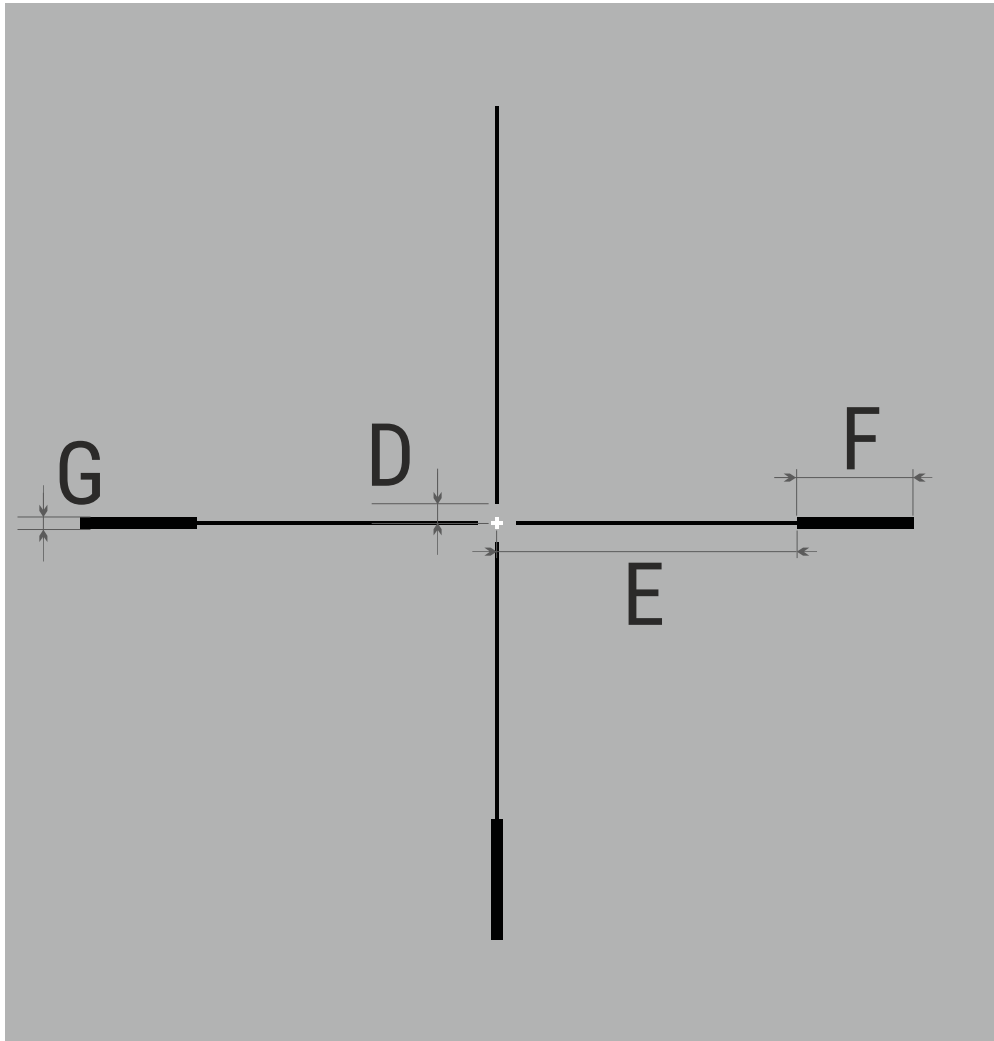



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.5 / 4 |
| Section B | 1.5 / 4 |
| Section C | 0.75 / 2 |
| Section D | 2.5 / 7 |
| Section E | 35 / 102 |
| Section F | 15 / 44 |
| Section G | 1.75 / 5 |

X58i

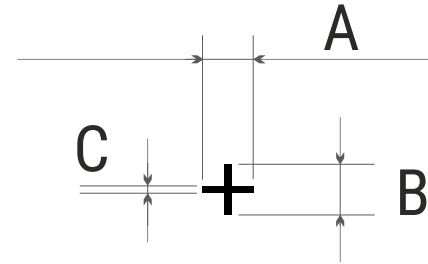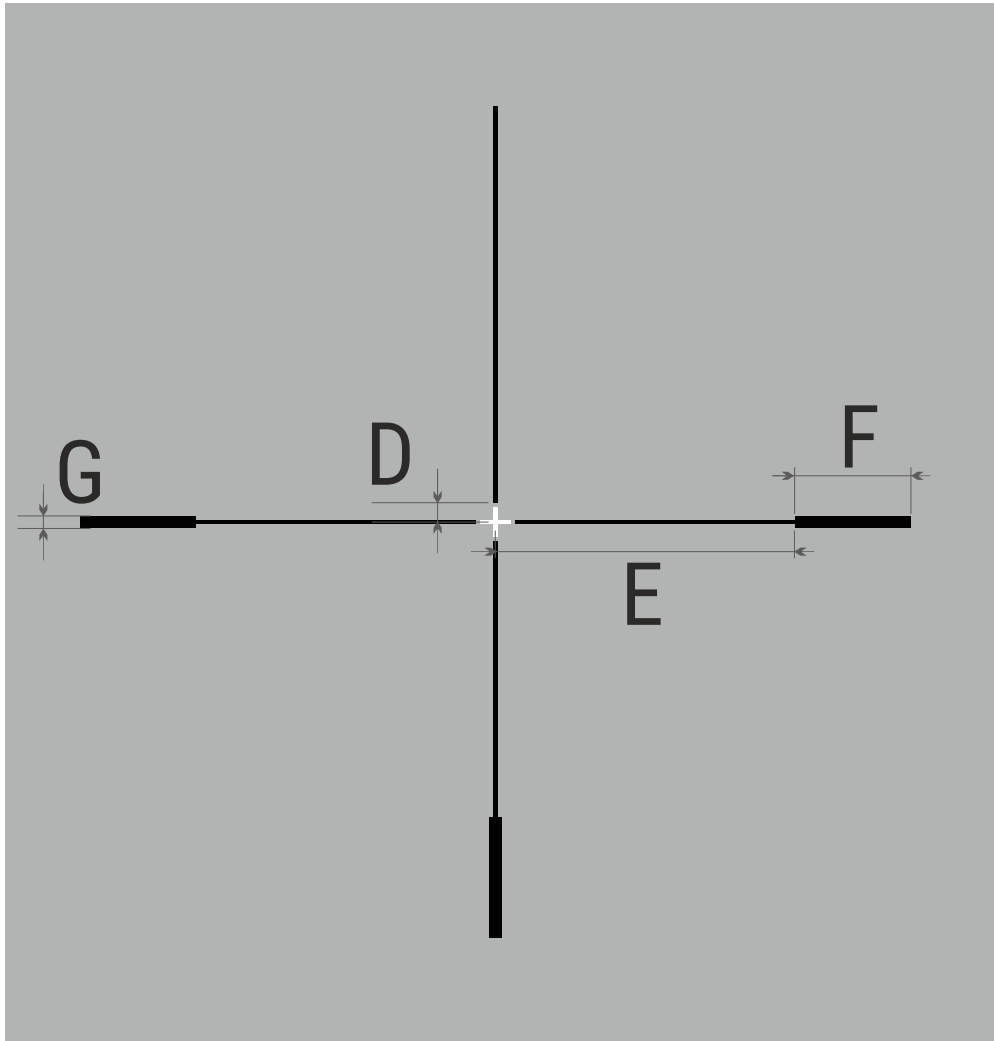



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 3.5 / 10 |
| Section B | 3.5 / 10 |
| Section C | 0.75 / 2 |
| Section D | 2.5 / 7 |
| Section E | 35 / 102 |
| Section F | 15 / 44 |
| Section G | 1.75 / 5 |

X50i

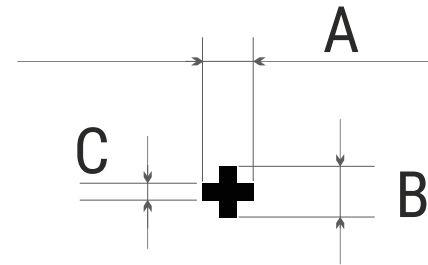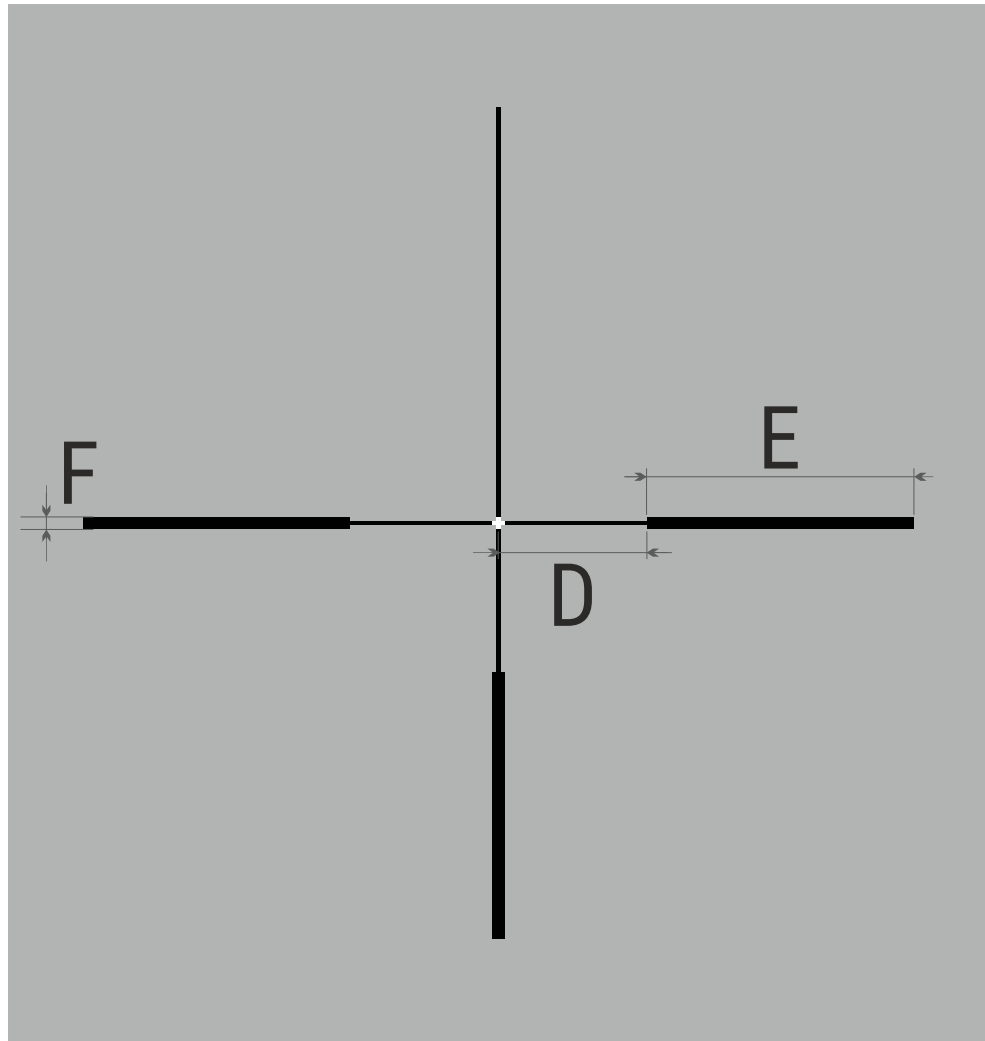



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.75 / 5 |
| Section B | 1.75 / 5 |
| Section C | 0.75 / 2 |
| Section D | 17.5 / 51 |
| Section E | 32.5 / 95 |
| Section F | 1.75 / 5 |

X57Ai

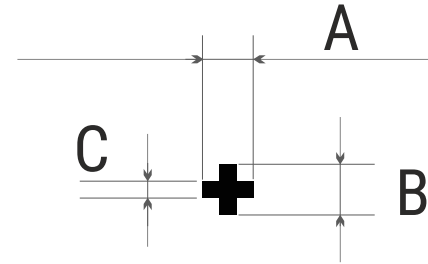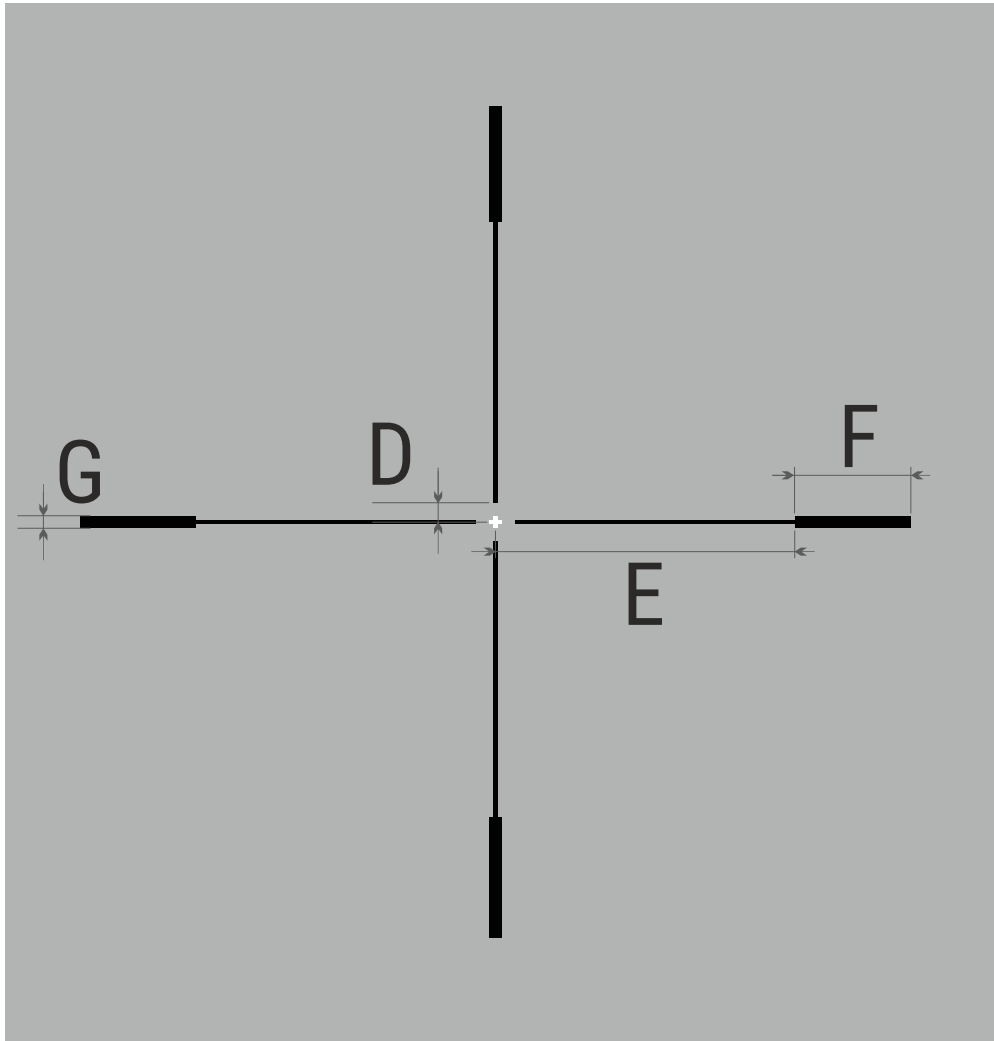



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.5 / 4 |
| Section B | 1.5 / 4 |
| Section C | 0.75 / 2 |
| Section D | 2.5 / 7 |
| Section E | 35 / 102 |
| Section F | 15 / 44 |
| Section G | 1.75 / 5 |

X58Ai

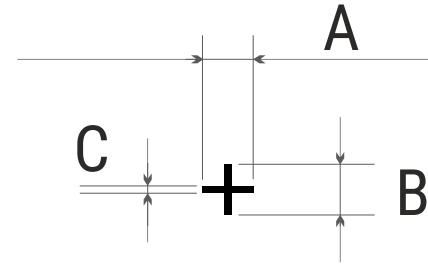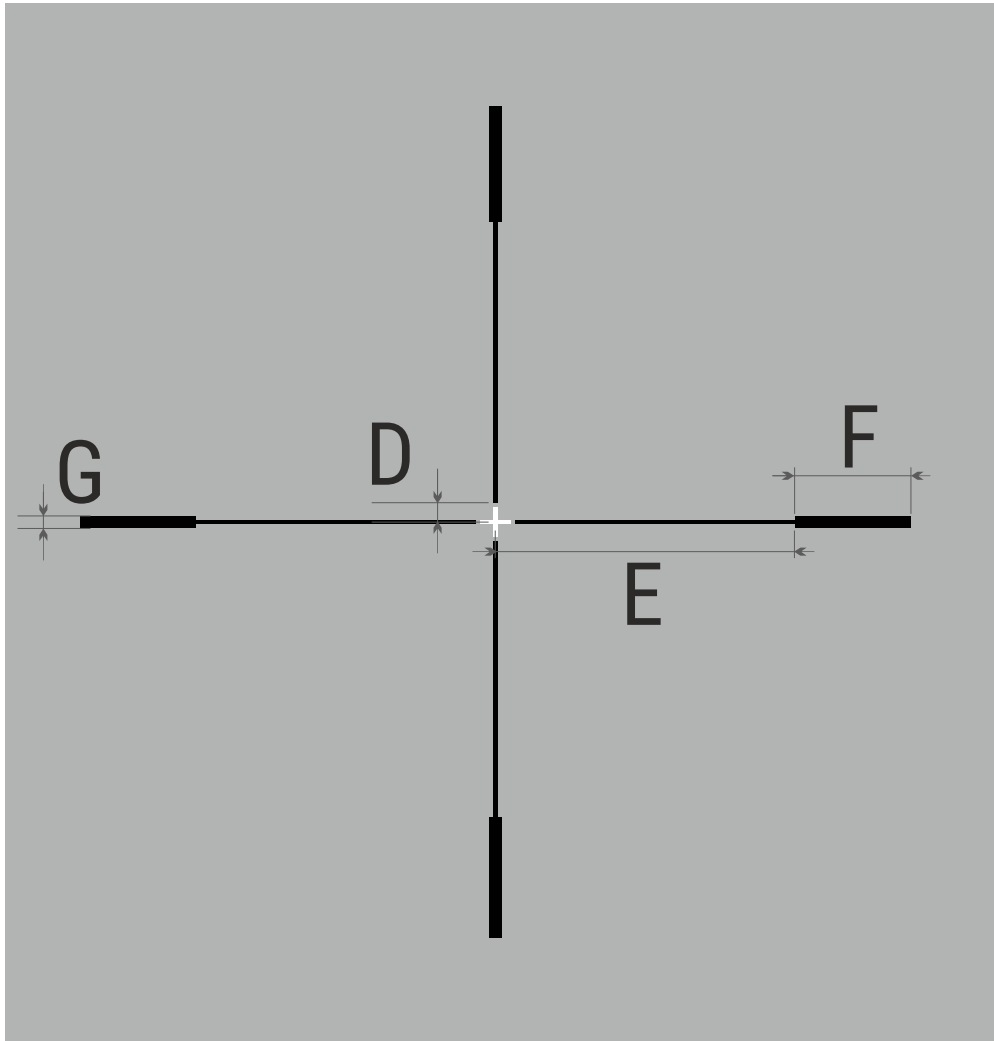

| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 3.5 / 10 |
| Section B | 3.5 / 10 |
| Section C | 0.75 / 2 |
| Section D | 2.5 / 7 |
| Section E | 35 / 102 |
| Section F | 15 / 44 |
| Section G | 1.75 / 5 |

X50Ai

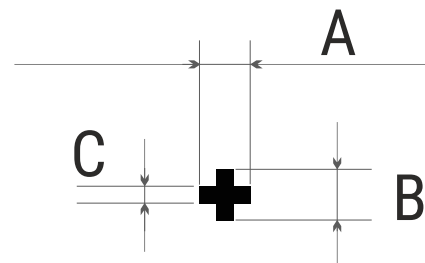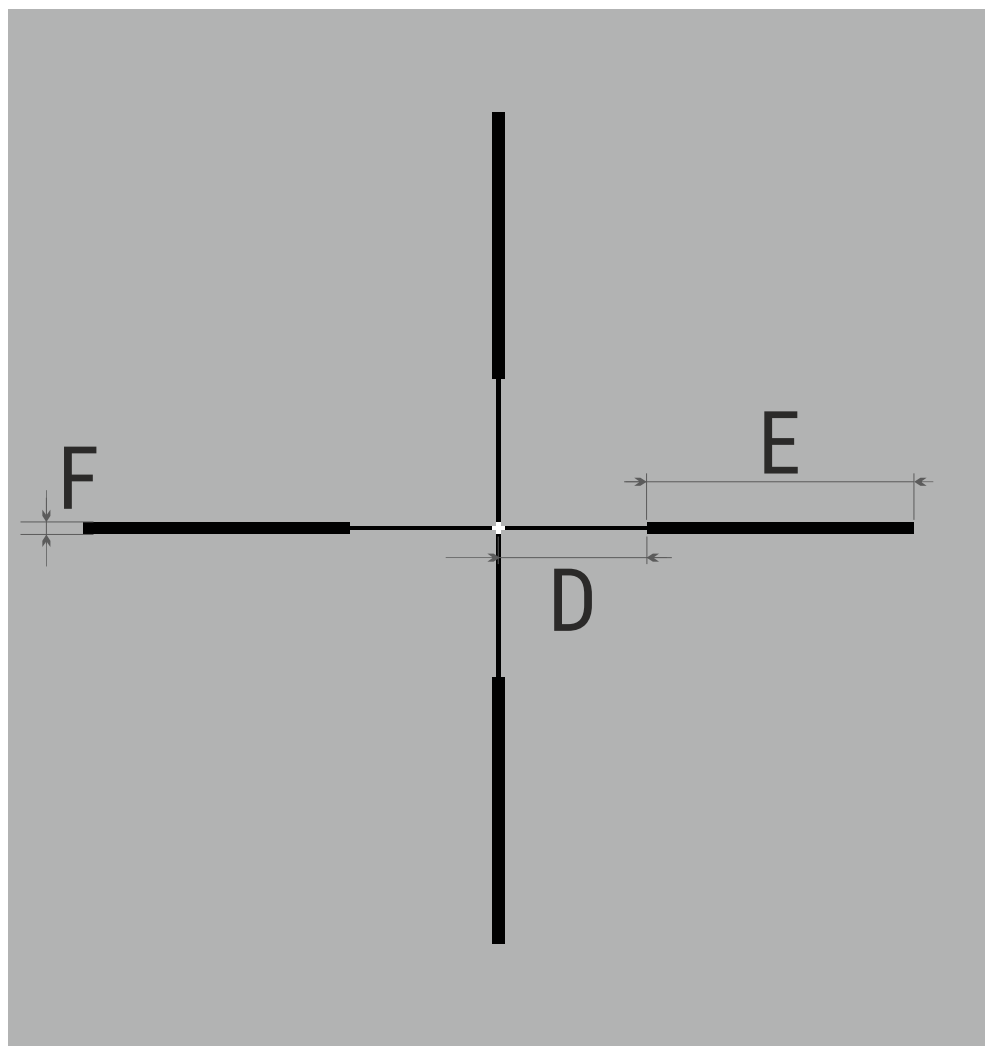

| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A | 1.75 / 5 |
| Section B | 1.75 / 5 |
| Section C | 0.75 / 2 |
| Section D | 17.5 / 51 |
| Section E | 32.5 / 95 |
| Section F | 1.75 / 5 |